


GENERAL
SHACKLES
THIMBLES
SOCKETS
LINKS
SWIVELS
HOOKS
MOORING
OTHERS

Material : Alloy steel, Grade R3/R3S/R4/R4S/R5
 Finish : Painted
 Temperature range : -40°C up to +200°C, Polar Rated
 Standard certification : Certificate of Conformity
 3.1 material certificate EN 10204

PMS / LTM forged sockets are prepared to operate in a wire-rope connection with a flange-mounted bending stiffner. The stiffner protects the rope for buckling during transport and installation.

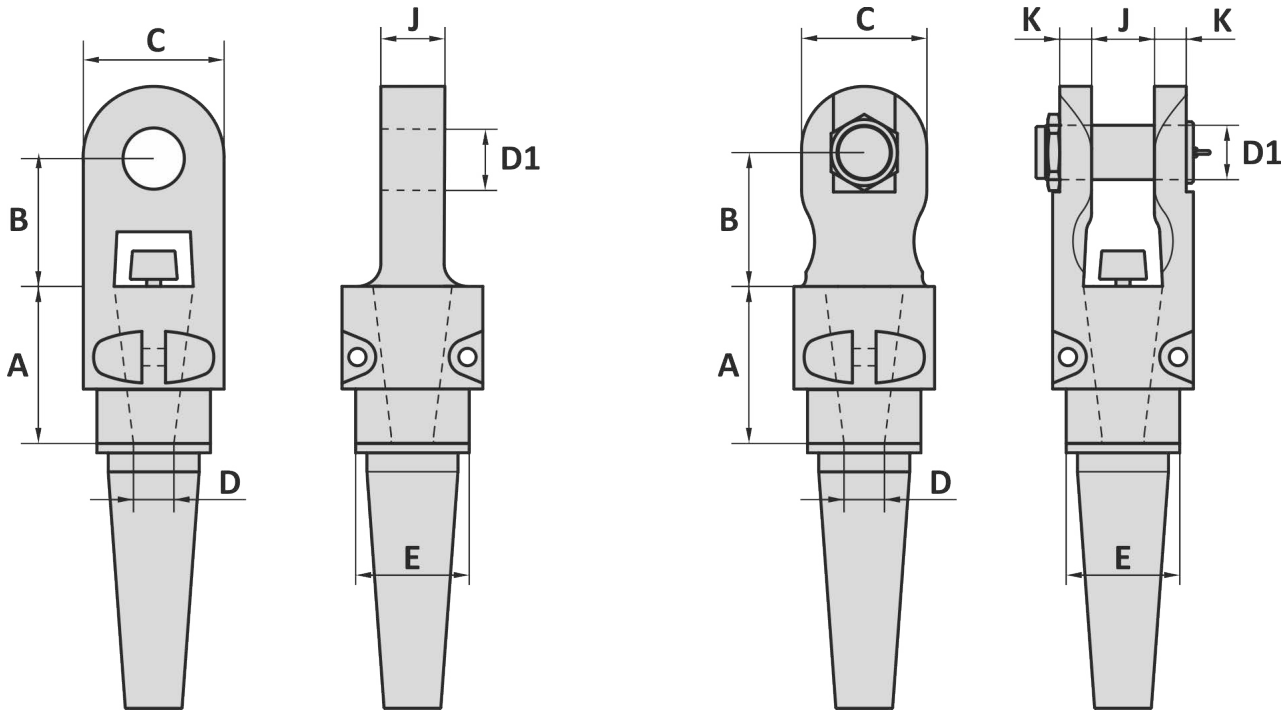

Dimensions on customer request

- Available with: Tapped holes (for lifting)
- Orkot isolation
- Padeyes
- Anode
- Bend stiffner
- Domed nuts
- Locking system

Tolerance: Machined parts ± 1 mm

14-10-2014