
TYPE HK5N MA

Material : Alloy steel
Safety factor : 4 times
Finish : Painted
Temperature range : -40°C up to +200°C, Polar Rated
Standard certification : Certificate of Conformity
3.1 material certificate EN 10204

Complete spare kit to replace trigger and latch available on request.



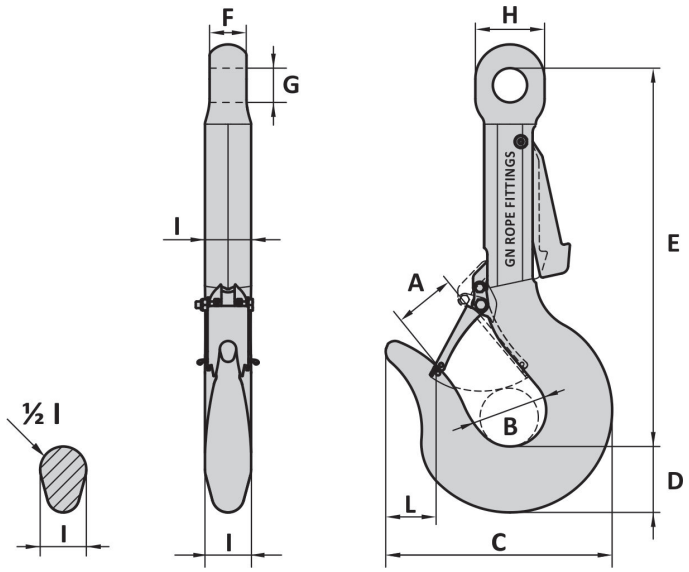

Art. No.	Art. No. latch	WLL ton	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	J mm	K mm	L mm	Weight kg
54100006	53300006	6.5	40	55	182	50	400	30	28	60	45	50	225	39	8
54100008	53300008	8.5	52	68	208	55	450	30	31	75	50	56	228	47	11
54100012	53300012	12	60	80	254	70	480	41	40	78	55	61	227	63	16
54100017	53300017	17	67	90	297	85	514	48	44	88	60	67	226	79	22
54100025	53300025	25	92	110	344	100	574	56	52	105	70	78	233	76	34
54100035	53300035	35	110	130	395	120	628	58	60	124	85	96	230	79	56
54100042	53300040	42.5	119	150	425	130	640	70	70	135	100	96	230	79	69
54100055	53300050	55	133	160	468	143	708	80	74	145	105	101	228	81	90
54100063	53300063	63	139	165	492	153	755	85	86	170	110	113	222	80	113
54100085	53300080	85	138	170	520	170	840	100	86	190	120	119	235	86	141

Tolerance: Forged parts ± 5%, machined parts ± 1 mm

Art. No.	Art. No. latch	WLL ton	A inch	B inch	C inch	D inch	E inch	F inch	G inch	H inch	I inch	J inch	K inch	L mm	Weight lbs
54100006	53300006	6.5	1 9/16	2 5/32	7 5/32	1 31/32	16 3/4	1 3/16	1 3/32	2 3/8	1 25/32	1 31/32	8 7/8	1 17/32	18
54100008	53300008	8.5	2 1/16	2 11/16	8 3/16	2 5/32	18 29/32	1 3/16	1 7/32	2 15/16	1 31/32	2 3/16	8 31/32	1 27/32	24
54100012	53300012	12	2 3/8	3 5/32	10	2 3/4	20 1/16	1 5/8	1 9/16	3 1/16	2 5/32	2 13/32	8 15/16	2 15/32	35
54100017	53300017	17	2 5/8	3 9/16	11 11/16	3 11/32	21 21/32	1 7/8	1 3/4	3 15/32	2 3/8	2 5/8	8 29/32	3 1/8	49
54100025	53300025	25	3 5/8	4 5/16	13 9/16	3 15/16	24	2 3/16	2 1/16	4 1/8	2 3/4	3 1/16	9 3/16	3	75
54100035	53300035	35	4 5/16	5 1/8	15 9/16	4 23/32	26 3/8	2 9/32	2 3/8	4 7/8	3 11/32	3 25/32	9 1/16	3 1/8	123
54100042	53300040	42.5	4 11/16	5 29/32	16 3/4	5 1/8	25 3/16	2 3/4	2 3/4	5 5/16	3 15/16	3 25/32	9 1/16	2 3/4	152
54100055	53300050	55	5 1/4	6 5/16	18 7/16	5 5/8	27 7/8	3 5/32	2 29/32	5 23/32	4 1/8	3 31/32	8 31/32	3 3/16	198
54100063	53300063	63	5 15/32	6 1/2	19 3/8	6 1/32	29 23/32	3 11/32	3 3/8	6 11/16	4 5/16	4 7/16	8 3/4	3 5/32	249
54100085	53300080	85	5 7/16	6 11/16	20 15/32	6 11/16	33 1/16	3 15/16	3 3/8	7 15/32	4 23/32	4 11/16	9 1/4	3 3/8	311

Tolerance: Forged parts ± 5%, machined parts ± 1/32 inch

15-10-2026