


Material : Alloy steel
 Hardness less than 35 HRC / 328 HB
 Yield strength less than 950 MPa
 Safety factor : 4 times
 Finish : Painted
 Temperature range : -40°C up to +200°C, Polar Rated
 Standard certification : Certificate of Conformity
 3.1 material certificate EN 10204

Non-standard sizes or custom products available on request

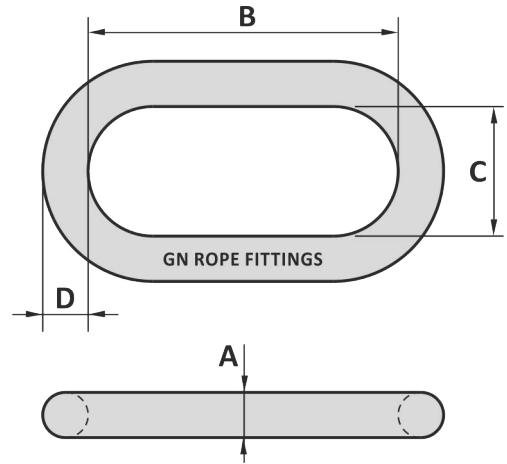

Art. No.	WLL ton	MBL ton	A mm	B mm	C mm	D mm	Weight kg
12910055	55	220	65	400	200	80	39
12910085	85	340	85	450	250	100	76
12910125	125	500	95	450	250	110	95
12910150	150	600	115	450	300	130	153
12910200	200	800	125	500	300	145	198
12910250	250	1000	135	600	300	155	257
12910300	300	1200	145	600	300	175	312
12916000	400	1600	155	800	400	205	480
12917000	500	2000	175	800	400	220	603
12918000	600	2400	195	800	400	230	732
12918100	700	2800	200	850	400	235	795
12918200	800	3200	210	850	400	245	881
12918300	900	3600	230	900	400	270	1119
12918400	1000	4000	240	900	400	280	1226
12918500	1250	5000	260	1000	400	310	1579
12918600	1500	6000	270	1000	400	320	1712

Tolerance: Forged parts ± 5%

Art. No.	WLL ton	MBL ton	A inch	B inch	C inch	D inch	Weight lbs
12910055	55	220	2 9/16	15 3/4	7 7/8	3 5/32	86
12910085	85	340	3 11/32	17 23/32	9 27/32	3 15/16	168
12910125	125	500	3 3/4	17 23/32	9 27/32	4 5/16	209
12910150	150	600	4 17/32	17 23/32	11 13/16	5 1/8	337
12910200	200	800	4 15/16	19 1/16	11 13/16	5 23/32	437
12910250	250	1000	5 3/16	23 3/8	11 13/16	6 3/32	567
12910300	300	1200	5 23/32	23 3/8	11 13/16	6 7/8	688
12916000	400	1600	6 3/32	31 1/2	15 3/4	8 1/16	1058
12917000	500	2000	6 7/8	31 1/2	15 3/4	8 21/32	1329
12918000	600	2400	7 11/16	31 1/2	15 3/4	9 1/16	1614
12918100	700	2800	7 7/8	33 15/32	15 3/4	9 1/4	1753
12918200	800	3200	8 1/4	33 15/32	15 3/4	9 21/32	1942
12918300	900	3600	9 1/16	35 7/16	15 3/4	10 3/8	2467
12918400	1000	4000	9 7/16	35 7/16	15 3/4	11 1/32	2703
12918500	1250	5000	10 1/4	39 3/8	15 3/4	12 3/16	3481
12918600	1500	6000	10 3/4	39 3/8	15 3/4	12 19/32	3774

Tolerance: Forged parts ± 5%