


GENERAL
SHACKLES
THIMBLES
SOCKETS
LINKS
SWIVELS
HOOKS
MOORING
OTHERS

Material : Alloy steel
 Safety factor : 5 times
 Finish : Painted
 Temperature range : -20°C up to +200°C
 Standard certification : Certificate of Conformity

Suitable for use common studless links and end links
 Non-standard sizes or custom products available on request

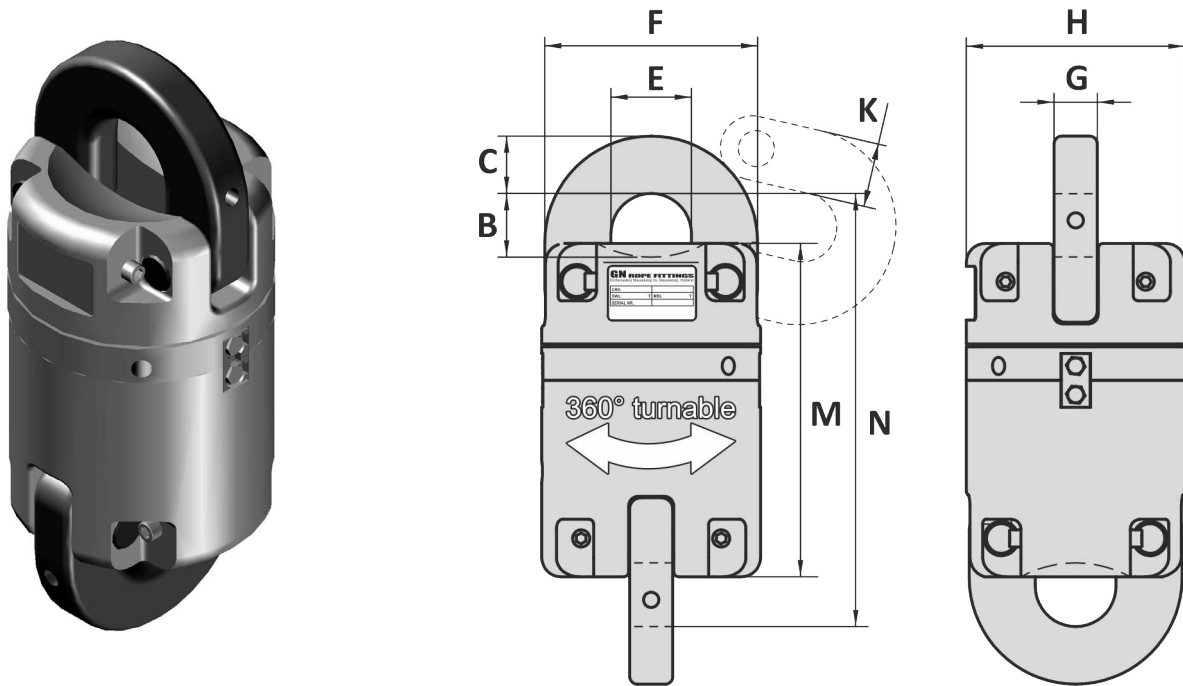

Art. No.	Type No.	Suitable chain	WLL ton	MBL ton	B mm	C mm	E mm	F mm	G mm	H mm	K mm	M mm	N mm	Weight kg
47040250	822	2	50	250	70	60	84	222	45	238	69	348	452	114
47040600	828	3	120	600	120	100	112	340	70	378	114	513	684	437
47040800	830	3 ½	160	800	152	120	140	400	80	420	130	600	840	624

Tolerance: ± 5%, machined parts ± 1 mm

Art. No.	Type No.	Suitable chain	WLL ton	MBL ton	B inch	C inch	E inch	F inch	G inch	H inch	K inch	M inch	N inch	Weight lbs
47040250	822	2	50	250	2 ¾	2 ⅝	3 ⅝	8 ¾	1 25/32	9 ⅜	2 23/32	13 11/16	17 13/16	251
47040600	828	3	120	600	4 23/32	3 15/16	4 13/32	13 ⅜	2 ¾	14 ⅞	4 ½	20 3/16	26 15/16	963
47040800	830	3 ½	160	800	6	4 23/32	5 ½	15 ¾	3 ⅝	16 7/32	5 ⅞	23 ⅜	33 1/16	1376

Tolerance: ± 5%, machined parts ± 1/32 inch

09-05-2014