


Material : Alloy steel
 Safety factor : 4 times
 Finish : Painted
 Temperature range : -40°C up to +200°C, Polar Rated
 Standard certification : Certificate of Conformity
 3.1 material certificate EN 10204

Spare latches available on request

Standard hook with safety latch

ROV-hook

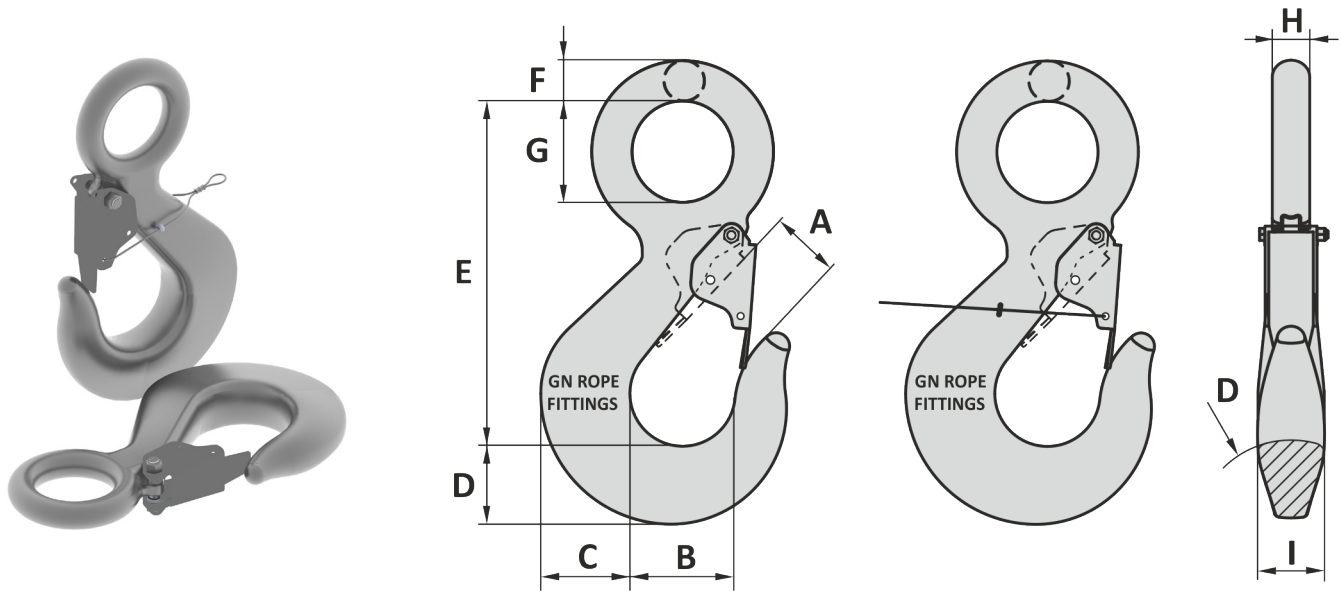

Art. No. standard	Art. No. ROV	Art. No. latch	WLL ton	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	Weight kg
51000008	51000009	53000003	8	42	62	54	49	187	23	51	23	37	3.6
51000012	51000013	53000010	11.5	48	75	68	60	230	29	64	29	43	6.7
51000016	51000017	53000022	16	56	84	76	67	255	33	70	33	52	9.7
51000020	51000021	53000018	22	74	110	93	80	320	41	89	41	64	17
51000028	51000029	53000023	28	75	111	99	85	354	38	95	38	63	19
51000031	51000032	53000031	32	86	124	109	95	389	43	100	43	70	26
51000040	51000041	53000030	40	98	139	121	106	457	48	130	48	80	37
51000050	51000051	53000035	50	113	157	139	120	495	54	130	54	89	52
51000063	51000064	53000036	63	124	175	155	134	565	60	150	60	99	73
51000080	51000081	53000037	80	137	197	172	149	690	67	170	67	110	106
51000100	51000101	53000137	100	155	225	200	177	725	79	175	79	125	158

Tolerance: Forged parts ± 5%, machined parts ± 1 mm

Art. No. standard	Art. No. ROV	Art. No. latch	WLL ton	A inch	B inch	C inch	D inch	E inch	F inch	G inch	H inch	I inch	Weight lbs
51000008	51000009	53000003	8	1 23/32	2 7/16	2 1/8	1 15/16	7 3/8	29/32	2	29/32	1 7/16	8.6
51000012	51000013	53000010	11.5	1 27/32	2 15/16	2 11/16	2 3/8	9 1/16	1 1/8	2 1/2	1 1/8	1 11/16	16
51000016	51000017	53000022	16	2 5/32	3 3/16	3	2 5/8	10 1/32	1 5/16	2 3/4	1 5/16	2 1/16	22
51000020	51000021	53000018	22	2 29/32	4 5/16	3 19/32	3 5/32	12 19/32	1 5/8	3 1/2	1 5/8	2 1/2	42
51000028	51000029	53000023	28	2 29/32	4 13/32	3 25/32	3 1/4	13 15/16	1 13/32	3 3/4	1 13/32	2 15/32	37
51000031	51000032	53000031	31	3 11/32	4 15/16	4 3/16	3 5/8	15 5/16	1 9/16	3 15/16	1 9/16	2 3/4	51
51000040	51000041	53000030	40	3 25/32	5 1/2	4 21/32	4 1/16	18	1 25/32	5 1/8	1 25/32	3 5/32	75
51000050	51000051	53000035	50	4 3/8	6 7/32	5 5/16	4 9/16	19 1/2	2	5 1/8	2	3 1/2	108
51000063	51000064	53000036	63	4 27/32	6 15/16	5 15/16	5 1/8	22 1/4	2 3/16	5 29/32	2 3/16	3 29/32	139
51000080	51000081	53000037	80	5 11/32	7 13/16	6 5/8	5 23/32	27 5/32	2 15/32	6 11/16	2 15/32	4 3/16	218
51000100	51000101	53000137	100	6 1/32	8 7/8	7 11/16	6 25/32	28 5/16	2 29/32	6 7/8	2 29/32	4 15/16	353

Tolerance: Forged parts ± 5%, machined parts ± 1/32 inch

10-03-2025

GENERAL SHACKLES THIMBLES SOCKETS LINKS SWIVELS HOOKS MOORING OTHERS